


30' Wide Mono Tube Building



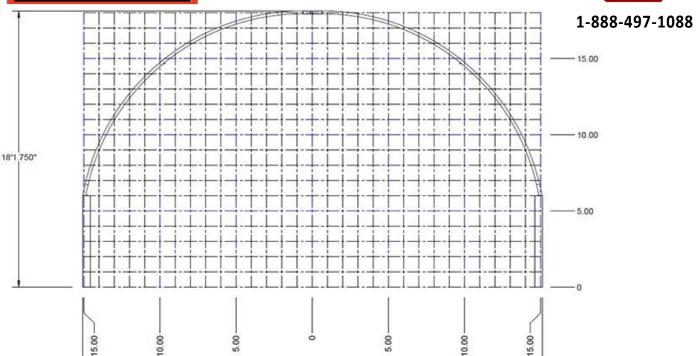

Frame

- Rafters: Constructed of 2.875 inch 14 gauge round zinc plated tube.
- Rafter spacing: 6' spacing starting at 24' long to any length.
- **Pony wall model:** Flat base plate must set on 6" minimum wood post or concrete wall. Wall must be at least 2' tall to allow for tensioning.
- Assembly: Easy to assemble. Each rafter has 2 sections and 3 rows of purlins for easy shipping.

30'2.8752

Fabric

- 20 year Elite high density UV resistant polyethylene with pipe pockets.
- **Colors:** White, Blue, Green, Red, Tan, Silver/Gray, Frost/Transluent. Available as solid color buildings or with colored conestoga ends or stripes.

Tensioning

- Side Tensioning: Steel pipe with 2" tie down ratchets at every other rafter and ends.
- End Tensioning: Pipe pocket for PVC and ratchet straps.
- Conestoga: 1" pre-installed webbing with 1" ratchets for snugging.

Options

- Fabric end walls with steel supports and pockets for PVC pipe and ratchets.
- Ridge or end vents.

Included

• Frame, cover, lag bolts, assembly hardware.

Not included

• Posts, rub rail, baseboards or concrete anchors.



hoopbarn.com Infinite Earth, LLC Marion, SD USA 1-888-497-1088