


62' Wide Heritage Structure



1-888-497-1088

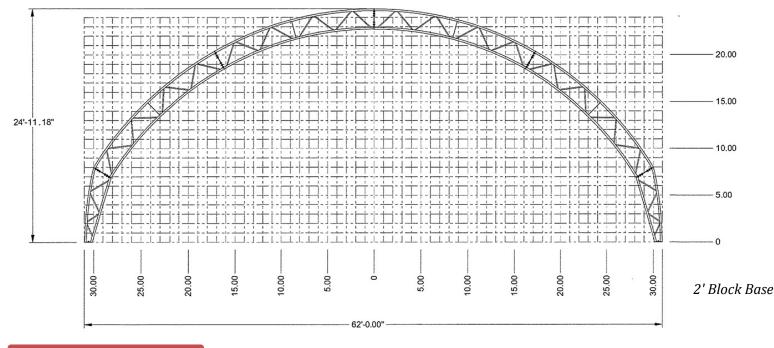

Frame

- Rafters: Welded truss construction with 2 3/8-inch 13 gauge top and bottom chords.
- Rafter spacing: 10', 12', 14' or 16' spacing starting at 40' long to any length.
- **Pony wall model:** Flat base plate must set on 10" minimum concrete wall. Wall must be at least 2' tall to allow for tensioning. Not recommended for wood posts.
- Assembly: Easy to assemble. Each rafter comes in sections with separate purlins for easy shipping.

Fabric

- 20 year Elite high density UV resistant polyethylene with pipe pockets.
- Colors: White, Blue, Green, Red, Tan, and Silver/Gray. Available as solid color buildings or with colored conestoga ends or stripes.

Tensioning

- Side Tensioning: Steel pipe with 2" tie down ratchets at every rafter.
- End Tensioning: Pipe pocket for PVC and ratchet straps.
- Conestoga Tensioning: Coated steel cable.

Options

- Fabric end walls with steel supports and pockets for PVC pipe and ratchets.
- Ridge or end vents.

Included

• Frame, cover, lag bolts, assembly hardware.

Not included

• Posts, rub rails, baseboards or concrete anchors.



hoopbarn.com Infinite Earth, LLC Marion, SD USA 1-888-497-1088